




Life is Precious.
Be Safe.

Arie+

Group II, III (15-36kg)

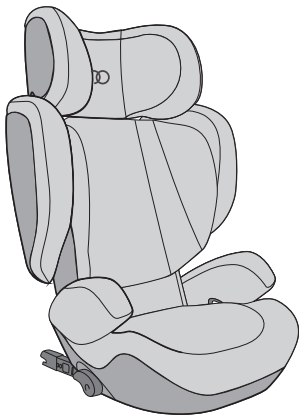

Instruction Manual

The child restraint is approved to UN ECE regulation 44/04.

Please read all the instruction in this manual before installing and using the product

Notices

1. The child car seat must only be used in vehicles which are fitted with a three point seat belt system that has been approved by regulation ECE-16 or similar.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle hand book that the vehicle is capable of accepting a 'Universal' child restraint for this group.
3. The child car seat is a 'Universal' child restraint; it conforms to regulation ECE-R44/04 for general use in vehicles.
4. This child car seat has been declared 'Universal' under more stringent conditions than those applied to earlier designs, which do not carry the 'Universal' mark.
5. Child car seats can mark vehicle seat upholstery. The manufacturer cannot be held responsible for damage or marking to vehicle seats.
6. The following situations could be illegal and will void the warranty: 1) Any modifications or change of use of the child car seat that have not been authorised or advised by the manufacturer. 2) Any failure to fit the child car seat in strict accordance with the instructions. The manufacturer accepts no liability for issues arising from unauthorised modifications, uses or fitting.
7. Please keep this manual safe for any possible queries you may have in the future.
8. You will need to keep your proof of purchase. We recommend you keep them together.

GETTING STARTED

Read Carefully Before Attempting to Fit the Child Car Seat

Warning: NEVER leave your child unattended – your child's safety is your responsibility.

Warning: The child car seat must be fitted in accordance with the manufacturer's instructions. Incorrect installation could be dangerous.

Warning: This installation must only be performed by a competent adult. Don't try to install the seat when intoxicated or very tired.

Warning: Always ensure that new or occasional users [e.g. grandparents] have read the instructions or been taught the correct installation by someone who has read and understood the instructions.

Warning: Always keep this instruction manual with the child car seat, or in the vehicle in which you are carrying the child car seat. Some models of child car seat have a pocket to store the instructions.

Before Starting

Warning: Do not fit the child car seat on a side or rear facing vehicle seat.

Warning: Before installing the child car seat ensure that the passenger seat you are using is locked in the upright position.

Warning: Do not use the child car seat in the home - it has only been designed to be used in the car.

Warning: Do not leave loose/unsecured objects on the back seat of your car or the parcel shelf. They may be dangerous to your child if you are forced to brake suddenly.

Which is the safest passenger seat to fit your child car seat to?

THE CENTRE REAR PASSENGER SEAT

If your centre rear passenger seat is fitted with a three point seat belt system then you should use it.

If your centre rear passenger seat does not have a three point seatbelt system (i.e. no seatbelt at all, or only a lap belt)

- then you should use the rear left passenger seat or the rear right passenger seat.

The front passenger seat can only be used if it **DOES NOT** have an airbag and IS fitted with a three point seat belt system.

EXTREME HAZARD

**NEVER USE IN FRONT PASSENGER SEATS EQUIPPED WITH AIRBAGS (SRS)
THIS CAN INCLUDE REAR PASSENGER SEATS THAT ARE EQUIPPED WITH AIRBAGS***

*Consult car manufacturer for suitability. Children's bodies are not able to withstand the forces exerted on them by a deploying air-bag

When Using the Child Car Seat

Warning: Make sure that the child car seat is placed somewhere so that rigid items and plastic parts do not become trapped in doors or movable seat units when the seat is in everyday use.

Warning: Always use the child safety lock system, if one is available, to make it impossible for the child to open the car doors from inside.

Warning: Allow the child a break during long car journeys and make sure they don't get out of the car unaided and without supervision.

Warning: Ensure that the child car seat is secured to the car seat at all times - even when not in use.

Warning: The child car seat must not be used without its original cover. The original cover is essential for the safe operation of the child car seat.

Warning: Stop the car at regular intervals to check that the child car seat is in the correct position and that the car seatbelt is still taut and latched.

Warning: In the event of an emergency it is important to be able to release the child quickly (as defined by British Standards). This means that the seat buckle cannot be fully tamper proof and you should actively discourage your child from playing with or using the buckle.

Warning: If you travel with passengers using both the front and the rear passenger seats, the lighter occupants should be in the rear and the heavier occupants in the front.

Warning: If you have no option other than to put your child car seat on a rear passenger seat next to side airbags:

- Consult with your vehicle manufacturer for side airbag details. It may not be safe.
- Make sure your child does not lean into the area immediately around the airbag.

Warning: Do not place anything under the child car seat (e.g. a towel or cushion) as this could affect the performance of the seat in an accident.

Warning: Avoid winter clothing bundling - Bulky clothing can lead to incorrect harness tightening. In an accident, the child can slip right out of the extra padding - and thus out of the seat. Let the car warm up or cool down prior to placing your child in there if possible. If your child is cold, place a blanket over the top of the harness.

Warning: In the event of an emergency it is important to be able to release the child quickly. This means that the seat buckle cannot be fully tamper proof and you should actively discourage your child from playing with or using the buckle.

Important: Ensure your child knows the harness is there to keep them safe.

Important: Do not start the engine until you are sure that your child is securely harnessed in their seat AND that you have also correctly fastened your seatbelt. Ask your child if everyone is safely belted up and whether it is okay to drive off.

Seatbelt

Warning: NEVER use any load bearing contact points other than those described in these instructions or marked on the child car seat.

Warning: Ensure that the lap section of the seatbelt or harness is worn low down, so that the pelvis is firmly engaged.

Warning: Make sure that ALL the passengers in your vehicle have their seat belts fastened, as unrestrained people can be very dangerous to the child in an accident. **Warning:** NEVER use a seatbelt routing scheme that differs from these instructions.

Warning: The lap and diagonal seat belt (and harness if fitted) must be used at all times when your child is in the child car seat.

Warning: Make sure that there are no twists in the seatbelt.

Sunlight/Hot days

Warning: Don't leave your child in the child car seat while parked in direct sunlight or on a hot day.

Warning: Do not subject the child car seat to prolonged direct sunlight as this may be dangerous for your child (the metal and plastic fittings could become hot) and may cause the fabric to fade. You can reduce this problem by covering the child car seat with a sheet when not in use.

Back of the Seat/Headrest

Warning: Ensure that the child car seat is as close as possible to the backrest of the car seat.

Warning: REMOVE the headrest of the passenger seat being used if it obstructs the proper installation of the child car seat. **REMEMBER** to refit the headrest when the child car seat has been removed.

Second Hand or Damaged Child Car Seats and Seat belts

Warning: Never buy a second hand child car seat. It may have unseen damage.

Warning: The manufacturer only guarantees this product when the original owner uses it.

Warning: You **MUST** replace the child car seat and your vehicles seat belts if they becomes badly worn or damaged.

Warning: You **MUST** replace the child car seat if it is involved in an accident – it may have unseen damage and may not protect your child as well as it should. At the very least send the child car seat to the manufacturers for inspection, together with the incident report.

Contents



Welcome	4
Parts checklist	4
Positioning the seat	5
Installing the child car seat	6-9
Removing the seat cover	10
Replacing the seat cover	11
Maintenance and cleaning	12

Welcome

Thank you for purchasing the child car seat. Please read these instructions carefully before use to ensure safe and satisfactory operation of this product.

Your child's safety is your responsibility. If you have a query with this product or require replacement parts, please contact your nearest retailer.

Parts checklist




- 1 Headrest
- 2 Side Protection Part
- 3 Armrest
- 4 Base

- 5 Adjust Lever
- 6 Diagonal Belt Guide
- 7 High Backrest
- 8 Lap Belt Guide

- 9 Isofix Connector
- 10 Isofix Adjuster Button
- 11 Instructions Storage (under base)

Positioning the seat



The child car seat can only be used with an automatic 3-point safety belt (A) and **NOT** with a 2-point lap belt (B).

The child car seat can be secured in a forward-facing position in the rear seats of the vehicle by using the existing seat belts. However, on some seats, if the installation is not properly secured, we suggest you try another seat in your vehicle.

Although not recommended, the child car seat can be used on a passenger side front seat, so long as there is no active airbag in place.

WARNING: Never use in a seat with an active airbag.

USE CATEGORY

Universal category

Installation with the vehicle's seat belt




Installation with the vehicle's seat belt and Isofix connectors



- The child is secured with the car's safety belt.
- The infant car seat is only testing against the car seat.

- The child is secured with the vehicle's seat belt.
- The infant car seat is secured to the vehicle with the two rear Isofix connectors.

Installing with vehicle's seat belt

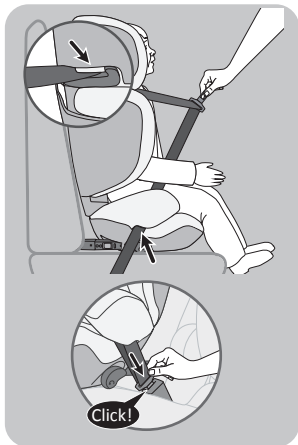

1. Place your child in the car seat and make sure they are sitting well back.


2. Thread the vehicle's seat belt through the belt guide under the headrest and the belt guide under the armrest.

2. 1. Pass the diagonal section of the seat belt through the belt guide under the headrest.

2. 2. Pass the lap section of the seat belt through the seat belt guide under the armrest next to the seat belt buckle.

2. 3. Ensure that no part of the seat belt has become twisted or trapped and that the car seat's fabric cover is not impeding the movement or correct fitting of the seat belt.


Installing the child car seat



3. Ensure that the diagonal belt lies gently on the child's shoulder and the lap belt is worn over the hips. Tighten the diagonal section of the seat belt by pulling it upwards until there is no slack and the belt holds the child firmly in place.

4. To take the child out of the seat, simply unfasten the seat belt and undo the shoulder belt guide.


Use the isofix system if your vehicle's seat has additional isofix anchor



If your vehicle is equipped with Isofix anchor points, these should be used to obtain a more stable installation.

These cars will have plastic elements that guide the seat's Isofix anchors into their correct positions. If your vehicle does not have these guide elements, you can use the plastic guides provided with the car seat.

Caution: When the seats of your car are equipped with Isofix anchor points, install your car seat using your vehicle's ISOFIX anchor points ALWAYS and ONLY in combination with the car's safety belts. See the vehicle list.

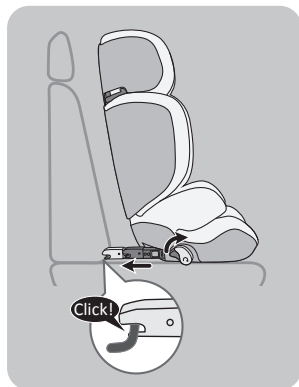

Match the back rest hook to the rear side of base from lying position to upright position, to make sure the back rest is fully matched into the base.


1. Place the car seat in the appropriate position on the vehicle's seat, facing in the direction of travel.
2. Rotate the adjuster button in anti-clockwise direction, and simultaneously pull the isofix connectors outwards as far as it goes, make sure it cannot be pushed backwards.
3. Position the car seat facing forwards on the vehicle seat with ISOFIX points.
4. Match the ISOFIX connectors to the vehicle's anchoring point until you hear a "click".
5. Rotate the adjuster button in anti-clockwise direction, and simultaneously push the seat against the vehicle to eliminate the gap between car seat and vehicle's seat.

ATTENTION!

ISOFIX connectors are an additional fitting system for securing the car seat and not suitable for securing a child.

Child must always be secured by means of the car's three-point safety Belt.

Installing the child car seat




REMOVING THE CAR SEAT.

To remove the car seat, pull the grey button backwards on the Isofix anchors to release the car seat from vehicle's Isofix anchor points.

ATTENTION!

If you have difficulty to release the Isofix connectors. Try to give a bit more force to the carseat against the vehicle's seat and simultaneously to pull the grey button backwards on the Isofix connectors to release the carseat. This may help, if not, please consult manufacturer or your retail stores.

Securing your child in the car seat

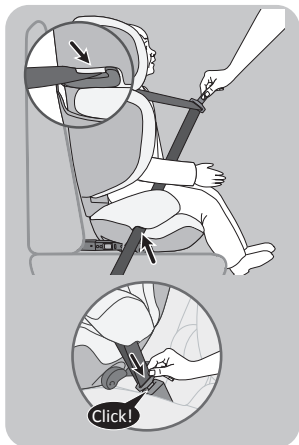

1. Place your child in the car seat and make sure they are sitting well back.


2. Thread the vehicle's seat belt through the belt guide under the headrest and the belt guide under the armrest.

2. 1. Pass the diagonal section of the seat belt through the belt guide under the headrest.

2. 2. Pass the lap section of the seat belt through the seat belt guide under the armrest next to the seat belt buckle.

2. 3. Ensure that no part of the seat belt has become twisted or trapped and that the car seat's fabric cover is not impeding the movement or correct fitting of the seat belt.


Installing the child car seat



3. Ensure that the diagonal belt lies gently on the child's shoulder and the lap belt is worn over the hips. Tighten the diagonal section of the seat belt by pulling it upwards until there is no slack and the belt holds the child firmly in place.

4. To take the child out of the seat, simply unfasten the seat belt and undo the shoulder belt guide.


Adjusting the headrest height



To adjust the height of the car seat's headrest, pull upwards on the button situated behind the headrest, and slide the headrest in the desired direction.

When you reach the correct height, release the button and move it until it reaches the closest blocking position. When done correctly, you should hear a 'click'.

Checking the height of the shoulder belt




To ensure the best protection for your child, the shoulder belt must be guided so that it passes gently over their shoulder. You will need to adjust this position as the child grows.


Removing the seat cover




Removing the headrest covers by pulling the cover forward and off.



Removing the wings by pulling the cover forward and off.






Departing the backrest from the base by making the seat flat and detach the connection point of the two parts.



Removing the base by pulling the cover forward and off.

Replacing the seat cover



Sliding the base cover onto each armrest, and then pull the cover over the front and down around the back of the base.

Mounting the backrest by connecting opint of the two parts.

Sliding the cover down, over each side impact system to secure the edge of cover is in the gap of the wings.

Sliding the headrest cover over the headrest to secure the edge of cover is in the gap of the headrest.

Maintenance and cleaning

Storage

- 1) Store this child car seat in a safe place when not in use.
- 2) **DO NOT** place heavy objects on top of it.
- 3) Always store the child car seat in a dry environment.
- 4) **DO NOT** store the child car seat near a direct heat source such as a radiator.

Covers

- 1) The seat cover is easily removable and should be handwashed with a pH neutral soap and cold water.
- 2) Do not press, iron, dry clean, tumble dry or wring the covers.
- 3) Do not use solvents, caustic or abrasive cleaning materials.
- 4) Dry flat, away from direct heat and sunlight.
- 5) If the seat covers need to be replaced only use certified parts. They are the only ones that are guaranteed to have been safety tested and designed to fit this seat.

Plastic/Metal Parts

- 1) Wipe clean using a mild soap and warm water.
- 2) You must not remove, dismantle or alter any part of the seat shell.
- 3) You must not oil or lubricate any part of the seat shell.

Inspection

- 1) Check your child car seat regularly for wear and tear.
- 2) The child car seat may have a slight rattle when not in use, this is normal. If in any doubt, contact us immediately.
- 3) Check the adjustable parts of your child seat at intervals of about 6 months to ensure it is still fits correctly for your growing child.

For Warranty Registration

Scan QR code for
Online Warranty Registration



www.koopers.co/warranty-registration/



Life is Precious.
Be Safe.

Koopers Distribution Sdn Bhd

☎ 03-78324338

🌐 www.koopers.co

📘 www.facebook.com/koopersmalaysia

✉ sales@koopers.co

📍 18-1, Jalan Bulan U5/BM, Section U5, Bandar Pinggiran Subang,
40150 Shah Alam, Selangor
Malaysia

