



Life is Precious. Be Safe



Life is Precious.  
Be Safe

## Danza

Group 0+

Applicable to  
0-13KG



Koopers Distribution Sdn Bhd

☎ 03-78324338

🌐 [www.koopers.co](http://www.koopers.co)

📘 [www.facebook.com/koopersmalaysia](https://www.facebook.com/koopersmalaysia)

✉ [sales@koopers.co](mailto:sales@koopers.co)

📍 18-1, Jalan Bulan U5/BM, Section U5, Bandar Pinggiran Subang,  
40150 Shah Alam, Selangor  
Malaysia

---

# User Manual

## For Warranty Registration

Scan QR code for  
Online Warranty Registration



[www.koopers.co/warranty-registration/](http://www.koopers.co/warranty-registration/)

Please read this instruction and relative parts of your vehicle manual. Please follow this instruction when installing and using this baby car seat. Not following this instruction may lead to a severe injury or death to your child. Please keep this instruction in safety place in case of future reading.

### Thanks for buying BC100B baby safety seat!

- 1.This is a "universal" children restraint system (CRS) which is approved to ECE Regulation No. 44, 04 series of amendments , for general use in vehicles and it will fit most, but not all, car seats.
- 2.A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.
3. This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. Only suitable if the approved vehicles are fitted with 3 point safety-belt approved to UN/ECE Regulation No. 16 or other equivalent standards.
- 5.If in doubt, consult either the child restraint manufacturer or the retailer.

Note: The picture is for reference only,subject to the actual products please.

## Content

1 Application scope	02
2 Important notes	03
3 Vehicle related notes	05
4 Assembly indicator	07
5 Baby safety seat user guide	08

- 5.1 Handle adjustment ..... 08
- 5.2 Seat cushion ..... 09
- 5.3 Use of canopy ..... 09
- 5.4 Baby fixation and notes ..... 10
  - 5.4.1 Y-shaped belt adjustment ..... 10
  - 5.4.2 Baby fixation ..... 12
- 5.5 Installation in vehicle ..... 13
- 5.6 Check the belt and make sure its route goes on correctly ---- 15
- 6 Maintenance ..... 16**
  - 6.1 Attention ..... 16
  - 6.2 Cover cleaning ..... 16
  - 6.3 Remove the canopy and cover ..... 17
  - 6.4 Installation of canopy and cover ..... 22
- 7 Warranty condition and warranty card ..... 25**

## 1.Application scope

Certificated by ECE R44/04 , this baby safety seat is applicable for Group 0+ infants.

Baby safety seat	Group	Range of baby weight
Danza	0+	0-13kg

## Certification

- This baby safety seat is designed and tested with the European Children Rstraint System standard (ECE R44/04) . The certification stamp E mark (in the round circle) with approval number and (in the ellipse circle) can be found on the labels (in the bottom side of this seat)
- Any modification of this seat by you will lead to invalidity of the certification. Nobody is authorized to modify baby safety seat unless the baby safety seat manufacturer.

## 2.Important notes

### To protect the baby

- Important!**Due to problem at birth, some baby might be under-weight, please confirm with the doctor before using this seat.
- Important!**Do not use any accessory which is not shown in this instruction.
- Important!**Do not fix this seat in ways that are not shown in this instruction.

### Caution

Please read this instruction carefully and keep it well for future reference unless you will not use this product any more. If this product is given to another person, please enclose this instruction along with the product. Not following this instruction to

## Baby safety seat

operate the product may cause safety risk and put your child into dangers.

- Please follow the instruction to install this product. Make sure all parts are correctly assembled or stored. When using on a normal vehicle, please make sure the baby car seat is not stuck by car seat or vehicle door.
- The car belt and baby car seat harness system must be fastened tight and adjusted according to the child's height. Not twisting of any strap.
- The waist strap of car belt must be used correctly. Make sure the waist strap can restrain the child's pelvis properly.
- After any impact or collision caused by a traffic accident, the baby car seat must be changed to a new one.
- If no fabric covers the surface of baby car seat, please do not expose the baby car seat into direct sunlight, or the child might be burned by the hot product surface.
- Do not left you child alone on the baby car seat without any guardian.
- The luggage and objects which can cause injuries during an accident must be stored properly.
- Modified and uncertified products are dangerous. Products without manufacturer's instruction are also dangerous.
- Baby car seats without fabric cover are forbidden to use. The fabric cover material must not be other materials other than the manufacturer's recommendation. The fabric material will influence the overall seat performance.
- Additional connection point is forbidden. Use the connection points indicated by the instruction only. Any doubt on the connection point, please consult with the manufacturer.


## User Instruction

### To protect passengers on board


- All heavy or sharp items must be fixed well.
- All passengers must fasten their seat belts.
- Make sure the baby safety always fixes well even no baby inside.

## 3.Vehicle related notes

- Use 2-point car belt to fix your baby safety seat may lead to severe injury or death to your child if crash happened.
- By placing the baby car seat on it, abrasive marks might be found on car seats made of sensitive materials such as silk and leather .



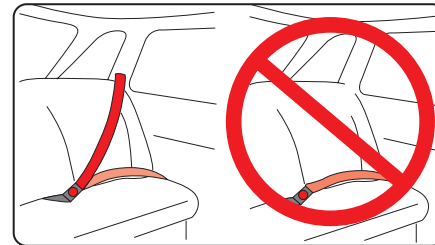


- Do not use this seat on side-facing or rear-facing car seats ( 1a 1b in drawing below). Only applicable for front-facing car seats. Crash statistic shows that children are safer in back row seats.
- Make sure the baby car seat is not stuck by foldable or movable seat and door.

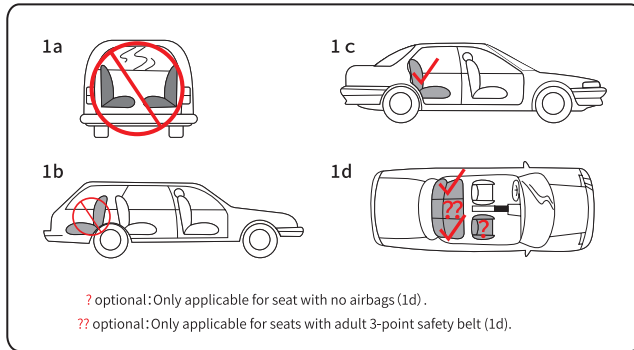

- Put the car belt into lowest position if its height is adjustable.
- Always fix this seat even if no baby inside. Unfastened baby safety seat may injure the passengers on board. Check other objects like luggage or books due to similar reason.
- The belt must be certificated by ECE R16/GB14166 or equivalent (please check the label with letter “e” on seat belts).
- Do not let the child adjust or play with this seat. Check the belt fasten status every time when using this seat.
- Do not use the same car belt together with your child.
- Do not let the child adjust or play with this seat. Check the belt fasten status every time when using this seat.
- Do not use the same car belt together with your child.

## 4.Assembly indicator

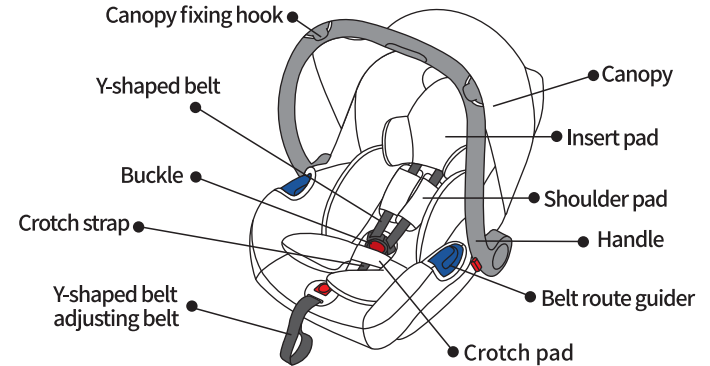


## Baby safety seat

# 5. Baby safety seat user guide

## 5.1 Handle adjustment


### Level description ( Figure 1 ) :

- A.** Balance position——balance the seat on the ground.
- B.** Cradle position——function as a cradle.
- C.** Carrier position——installation in cars or function as a baby carrier.



### Level adjustment:


- Push the handle adjustment button on both sides ( Figure 2 **D** ) at the same time. Then rotate the handle towards the wanted position. Release the button when near the ideal position, adjust the handle slightly until you hear the "click".



## User Instruction

## 5.2 Seat cushion


- The Seat cushion supports and protects your baby's head and back. The waist cushion ( Figure 3 **W** behind the head and back cushion ) can reduce the pressure on baby's waist ( After your baby grows up, the cushions can be removed to provide more inner space ).




## 5.3 Use of canopy

Canopy is used to prevent direct sunlight on your child's face. You can choose to use it or not.

1) While not using the canopy, release the canopy strap from the handle hook, and then fold the canopy cover ( Figure 4 ).



2) While using the canopy, adjust the handle to position **C** ( Figure 1 ) firstly, then fasten the canopy straps onto the handle hook ( Figure 5 ).



## Baby safety seat



### 5.4 Baby fixation and notes

#### 5.4.1 Y-shaped belt adjustment Length adjustment

- Extend the Y-shaped belt—press the adjusting button **E** ( Figure 6), mean while stretching out the belt.

**Note:** Do not put shoulder pad.


- Fasten—pull the adjuster strap (Figure 7).



#### Position adjustment


##### 1) Position adjustment

- As your baby grows up, Y-shaped belt can be removed from the metal splitter plate **G** ( on the back side of this seat ) and relocated from slot **J** to slot **H** ( Figure 8).




##### 2) Belt position standard:

- Keep Y-shaped belt even or a little bit lower than your baby's shoulder ( Figure 9).



##### 3) Y-shaped belt removal:


- loosen Y-shaped belt as long as possible.
- remove shoulder straps from the metal splitter plate ( Figure 8).
- Y-shaped belt installation ( Figure 10).



##### 4) Y-shaped belt installation:

- Pull the shoulder straps out of the slots and reconnect with the metal splitter plate ( Figure 11 ).

**Note:** Make sure both shoulder straps can go through the slots fully and no belt should be twisted.




## Baby safety seat

### 5.4.2 Baby fixation


#### 1) Release the Y-shaped belt

- Place the seat on an even surface, then adjust the handle to the “balance position” (Page 8 Figure 1, handle in position A).
- Loosen Y-shaped belt as long as possible (Page 10 Figure 6).
- Push the red button on buckle to release Y-shaped belt.
- Put aside the buckle tongues separately (Figure 12).



#### 2) Baby fixation

- Put your baby into the baby safety seat, then put Y-shaped belt onto baby's shoulder gently (Figure 13).
- Note:** Do not twist or cross Y-shaped belt.





## User Instruction

- To lock Y-shaped belt, place the two buckle tongues together properly, then plug it into the buckle slot. A “click” sound can be heard as a sign of locked (Figure 14).

**Note:** the proper location of the buckle is near your baby's crotch rather than his/her belly.

- Pull the adjuster strap through the arrow direction (Figure 15) to fasten the Y-shaped belt. The proper tightness is a two-finger space between Y-shaped belt and your baby's chest.



### 5.5 Installation in vehicle

- 1) Switch the seat handle to “carrier position”, then place this seat onto the back row car seat near the vertical cushion. The seat should be opposite to the driving direction (Figure 16).






## Baby safety seat



2) Pull out the car belt as long as possible. Place the lap belt over this seat and lock the car belt. Then put the lap belt into the belt route guider (Figure 17).

**Note :** No twisting or slipping of the car belts.



3) Drag the shoulder belt over the baby seat, put the shoulder belt into the blue belt route guider (Figure 18 K).

**Note :** No twisting or slipping of the car belts.




## User Instruction

4) Fasten the car belt (Figure 19)

- push the baby seat to the car seat.
- pull the lap belt horizontally to fasten it.
- Pull the upper shoulder belt to fasten the rest parts and the whole car belt.

**Note :** Make sure the baby safety seat is fixed well.



## 5.6 Check the belt and make sure its route goes on correctly

- Do not place your baby car seat too close to the car seat belt buckles (Figure 20,21).



## Baby safety seat

# 6.Maintenance

## 6.1 Attention

- **Accidents happened when the car speed higher than 10km/h,** may cause invisible damage to the baby safety seat. Please change your baby safety seat after crash accident.
- Check all important parts regularly, make sure all mechanism functions properly.
- To avoid damage, make sure no part of this baby seat is stuck by car door, foldable car seat or any other objects.
- Do not lubricate any part with lubricants.
- Store your baby car seat in safe place when not using. Avoid heavy objects, direct sunshine or direct heat on it.

## 6.2 Cover cleaning

**⚠ Baby safety seat must not be used without cover.**


- The cover can be removed. Clean the cover in warm water ( lower than 30 °C ) with mild detergent, dry naturally. No drying.
- Plastic parts can be cleaned with soap water. Do not use strong detergent ( for example, dissolvant ).
- Straps and tethers can be cleaned in soap water.
- Shoulder pad can be removed and cleaned in soap water.

## User Instruction


## 6.3 Remove the canopy and cover

### Remove the canopy

- The non-removable canopy bracket is used for storing the canopy. To remove or install the canopy, the bracket can be pulled out for a short distance ( Figure 22 ).





- Remove the canopy from the handle hook, and then pull it backward softly ( Figure 23 ).




## Baby safety seat

● Switch the handle to position **C** ( Page 8 Figure 1 ) . Find the clamp slot, release the canopy along the arrow' s direction ( Figure 24 **N** ).




● lift up the canopy ( Figure 25 ) cloth along the top gap ( Page 17 Figure 22 ). Pull out the canopy from the seat.




## Remove cover:


● Push the red button on the buckle to release Y-shaped belt ( Figure 26 ).



● Remove the shoulder pad ( Figure 27 ).




● Take out the insert pad ( Figure 28 ).





## Baby safety seat

● Switch the handle to position **●** ( Page 8 Figure 1 ). Find the clamp slot, release the cover along the arrow' s direction ( Figure 29 ).




● Pull down the cover along the arrow' s direction ( **●** ). Release the cover hook ( Figure 30 ).


**Note:** For safety reason, frequent removing is not recommended.




● Pull out the cover from both sides. Hold the seat with one hand, and pull the cover according to the arrow' s direction until you see a small gap between the central adjuster and the cover ( Figure 31 ).



● lift up the cover ( arrow direction ) to remove the cover from the central adjuster completely ( Figure 32 ).



● Drag the bolt **●** out of the slot **R**, and then lift up the cover ( arrow direction ) to remove it ( Figure 33 ).




## Baby safety seat


### 6.4 Installation of canopy and cover

#### Cover installation:


●Put the cover onto the shell. Let the crotch strap pass through the crotch pad ( Figure 34 ).




●let the Y-shaped belt go through the cloth slot ( Figure 35 ).




●Hold the seat with one hand. Push the cover into the small gap under the central adjuster with the other hand. Then make the cover tidy and even ( Figure 36 ).




●Hold the seat back side with one hand, draw and fix the cover to the edge of seat ( Figure 37 ).



●Take similar action from the other side, and push the bracket pin into slot to fix the cover ( Figure 38 ).




●Set the handle to position A ( Page 8 Figure 1 ), put pins into corresponding slot on both sides ( Figure 39 ).



## User Instruction


## Baby safety seat

●Set the handle to position ● ( Page 8 Figure 1 ), draw the elastic band and fix it onto corresponding hook on both sides of the seat ( Figure 40 ).




## Canopy installation


●Fix the canopy onto the seat and put it into the space between bracket and seat ( Figure 41 ).



●After whole canopy is slipped into the bracket, then fix the elastic band into clamp slot ( Figure 42 ).



●Pull and fasten the canopy straps onto the handle hook, then the installation would be completed(Figure 43).



## User Instruction

## 8.Warranty condition and warranty card

The warranty covers manufacturing defects in material or workmanship for a period of one (1) years from the date of original purchase. Keep the warranty card and other sales documents well during the warranty period.

Once quality problem is found, please send back the product with warranty card. The return product must be kept tidy. The quality problem is restricted to product defects.

### Exclusive:

- Natural phenomenon or damage s caused by overload.
- Damages caused by incorrect or improper use.
- Damages caused by traffic accidents.

### Inclusive:

**Buckle:** except glitches result from dust and dirt.

Once quality problem is found, please contact the local retailer directly. When making a claim, the depreciation rate will be taken into account