



Life is Precious. Be Safe

Koopers Distribution Sdn Bhd

☎ 03-78324338

🌐 [www.koopers.co](http://www.koopers.co)

📘 [www.facebook.com/koopersmalaysia](https://www.facebook.com/koopersmalaysia)

✉ [sales@koopers.co](mailto:sales@koopers.co)

📍 18-1, Jalan Bulan U5/BM, Section U5, Bandar Pinggiran Subang,  
40150 Shah Alam, Selangor  
Malaysia




Life is Precious.  
Be Safe

Grow +

**Group III**

22-36kg (6 - 12yrs)

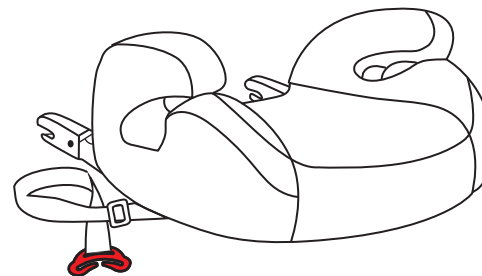

Instruction Manual

**IMPORTANT: READ THESE  
INSTRUCTIONS CAREFULLY BEFORE  
USE AND KEEP FOR FUTURE  
REFERENCE.**

If these instructions are not followed, the safety of  
a child may be severely endangered.

## CATALOGUE

1. Notice.....	2
2. Structure Name.....	3
3. Warning.....	3
4. Approval.....	6
5. Safety Seat Use Method.....	7
5.1 Removing the Fabric Cover.....	7
6. Installation.....	7
6.1 608 Group III, (22–36kg) Installed in the Forward Facing Position with ISOFIX connector and Vehicle Seat Belt.....	7
6.2 608 Group III, (22–36kg) Installed in the Forward Facing Position with Vehicle Seat Belt.....	10
7. Care and Maintenance.....	12
8. Main Technical Parameter.....	12

## 1. NOTICE

### 1.1 CHILD SAFETY WITH ISOFIX connector (Group III)

When using as Semi-universal category (Group III),  
please notice below information:

This child restraint is classified for  
“(Semi-universal)” use and is suitable for  
fixing into the seat positions of the following cars:

CAR	FRONT	REAR
	Outer	Centre
(Model)	-Yes-	-Yes- No

Seat positions in other cars may also be suitable to  
accept this child restraint. Please refer to the  
information documents or the retailer’s website for the  
suitable car model list. If in doubt, consult either the  
child restraint manufacturer or the retailer any time.  
Only suitable if the approved vehicles are fitted with  
3 point with retractor safety-belts and ISOFIX  
anchorage, approved to UN/ECE Regulation No. 16 or  
other equivalent standards.

### 1.2 CHILD SAFETY WITHOUT ISOFIX connector (Group III)



When using as Universal category (Group III), please  
notice below information:

This is a “Universal” child restraint. It is approved to Regulation No. 44, 04 series of amendments, for general use in vehicles and it will fit most, but not all, car seats. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a “Universal” child restraint for this age group.

This child restraint has been classified as “Universal” under more stringent conditions than those which applied to earlier designs which do not carry this notice. If in doubt, consult either the child restraint manufacturer or the retailer.

Only suitable if the approved vehicles are fitted with 3 point with retractor safety-belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

## 2.STRUCTURE NAME

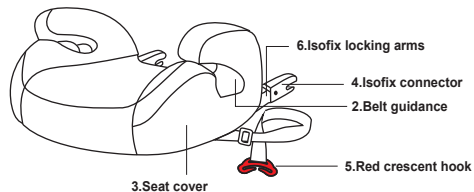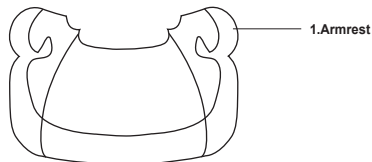

## 3.WARNING

**IMPORTANT!** Please carefully read and make sure you understand all instructions in this manual and in the vehicle owner’s manual related to child safety seats. Install and use the child safety seat as described in the instruction manual. Failure to do this could result in serious injury or death of your child. Keep the instructions together with the child restraint for future reference.

**DO NOT** modify or attempt to modify the child safety seat in any way.

**DO NOT** take apart or attempt to take apart this child safety seat except as instructed in this manual.

**DO NOT** use a child safety seat with damaged or missing parts.

**DO NOT** use damaged or frayed vehicle belt.

**NEVER** use this child safety seat without the car seat cover.

**DO NOT** replace the child seat cover with any other than the ones we recommend as these parts are integral to the child safety seat’s performance.

**NEVER** use this child restraint with any other base except ones that the manufacturer permits.

**DO NOT** use a child safety seat that has been in a crash. A crash can cause damage to the child safety seat that you cannot see.

**NO NOT** use a second-hand child seat or child seat whose history you do not know.



**ALWAYS** check the tightness of the restraint before each use.

**ALWAYS** make sure no vehicle belts are twisted before each use.



**NEVER** leave your child unattended even for a short time.

**DO NOT** leave your child in this restraint for an extended period of time.

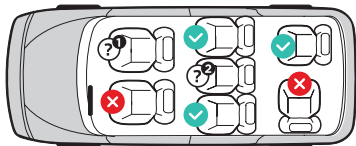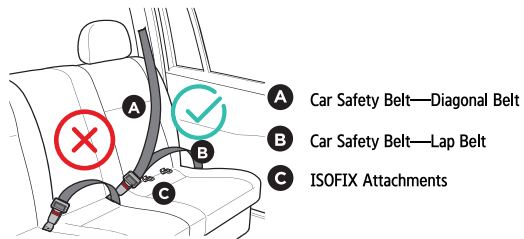**DO NOT** use on vehicle seats that face the sides or rear of the vehicle. Use the child safety seat only on forward-facing vehicle seats. According to accident statistics, children are safer when properly restrained in rear seats than in front seats.



Correct/ Proper  Wrong/ Improper

-  When the front seat with opened airbag, cannot install in this place.
-  Only with 3-point seat belt and ISOFIX attachments can install in this place.

**DO NOT** use in any configuration not shown in the instructions.

**NEVER** use this child safety seat with 2-point vehicle belts.

**DO NOT** use alternative routings not shown in these instructions.

**MAKE** sure that the child safety seat does not become trapped by a folding or moveable passenger seat or in the door of your car.

**MAKE** sure all folding passenger seats are properly latched.

**DO** make sure any loose objects such as luggage or books in your car are properly secured as they may cause injuries in the event of an accident.

This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child safety seat may injure other occupants.

**ALL** occupants of the vehicle should be correctly restrained. Unrestrained passengers may be thrown against other passengers and cause serious injury or death in a crash.

**DO NOT** allow children to play with or adjust the child safety seat.

**NEVER** take a child out of the child safety seat when the vehicle is moving.

**HOT!** Cover the child safety seat when left in direct sunlight. Parts of a child safety seat may become too hot for the child's skin. Always check surfaces before placing a child in the seat. Seat cover may fade in direct sunlight.

#### 4.APPROVAL

##### Child Safety Seat

Tested and certified according to ECE R44/04, Group Body weight 22-36kg

608

22 to 36kg

The child safety seat has been designed, tested and certified according to the requirements of the European Standard for Child Safety Equipment (ECE R44/04). The test mark E (in a circle) and the certification number are located on the orange certification sticker (sticker on the child safety seat).

- This certification will be invalidated if you make any modifications to the child safety seat.
- The 608 child safety seat must only be used to secure your child in the vehicle. It must never be used as a seat or toy in the home.

**Risk of injury due to unauthorised modifications!**

Unauthorised technical modifications may reduce or entirely void the seat's protective properties.

- Do not make any technical modifications to the child seat.
- Use the child seat only as described in these user instructions.

The 608 offers a variety of mounting options, the following table indicates the types of installation for the respective groups:

Group III	Installation method	Child installation	User Guide chapter
(22–36 kg)	3-point belt + ISOFIX connector	(3-point belt) Vehicle belt	6.1
(22–36 kg)	3-point belt	(3-point belt) Vehicle belt	6.2


**5. SAFETY SEAT USE METHOD****5.1 Removing the fabric cover**

Take off the cover from the booster base directly.


**6. INSTALLATION****6.1 608 Group III (22–36kg)**

Installed in the forward facing position with ISOFIX connector and vehicle seat belt

6.1.1 Use the child safety seat only on forward facing vehicle seats. According to accident statistics, children are safer when properly restrained in rear seats than in front seats.

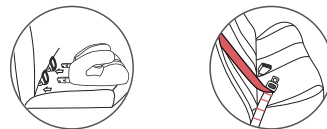


6.1.2 NEVER use this child safety seat with 2-point vehicle belts.

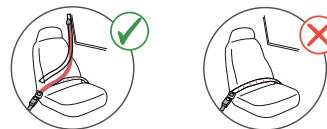

6.1.3 Car with ISOFIX connector.

6.1.3.1 Put the ISOFIX insert guide into the two ISOFIX attachments of your vehicle.

If you do not have ISOFIX Insert guide, please ignore this step.

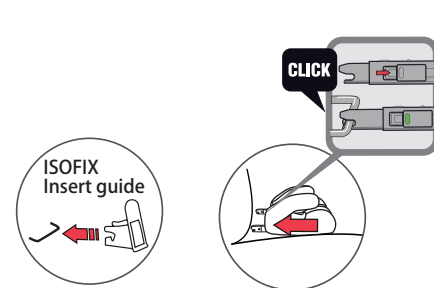

6.1.3.2 Press the ISOFIX button to pull out both ISOFIX locking arms.

6.1.3.3 Grasp the child seat with both hands and slide the two locking arms firmly into the insert guides until the locking arms engage with a clicking noise on both sides. The green safety button must now be visible on both sides. Try your best to push the booster, and it will be tighter.



6.1.3.4 Pull out the belt from the belt ALR.



Diagonal belt through Guidance ① and lap belt through the belt slot ②, then put them together through Guidance slot ③. Place diagonal belt above armrest and lap belt under armrest.

NOTE: Make sure that the diagonal seatbelt section runs over your child's shoulder bone, and not in front of his or her neck.

6.1.3.5 Guide the diagonal belt into red crescent hook, make sure the diagonal belt runs over your child's shoulder bone, and not in front of his or her neck.

NOTE:

It should be fully stuck to ensure that the seat belt is not twisted.

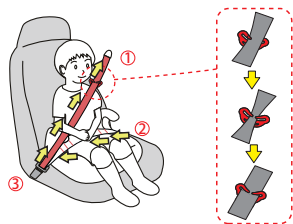



6.2 608 Group III (22–36kg)

Installed in the forward facing position with vehicle seat belt

6.2.1 Place the child seat forward facing on the vehicle seat (in the direction of travel).

6.2.2 First pull out the belt from the belt ALR.

Diagonal belt through Guidance ① and lap belt through the belt slot ②, then put them together through Guidance slot ③. Place diagonal belt above armrest and lap belt under armrest.

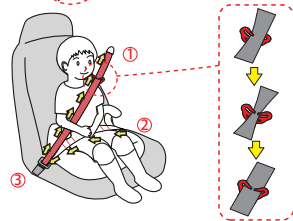


NOTE: Make sure that the diagonal seatbelt section runs over your child's shoulder bone, and not in front of his or her neck.

6.2.3 Lock the tip of the buckle into the vehicle seat buckle with a CLICK noise. Follow the direction of arrow to tighten belt, and put redundant belt into cloth cover. Shake the child safety car seat to make sure it is securely attached. CAUTION! The diagonal seat belt section must run diagonally backward. You can adjust the course of the belt with your vehicle's adjustable belt deflector on both sides.

6.2.4 Guide the diagonal belt into red crescent hook, make sure the diagonal belt runs over your child's shoulder bone, and not in front of his or her neck. It should be fully stuck to ensure that the seat belt is not twisted.

6.2.5 Check the length of the vehicle belt.  
The vehicle belt must be through the child's shoulder and hip. (Red part)

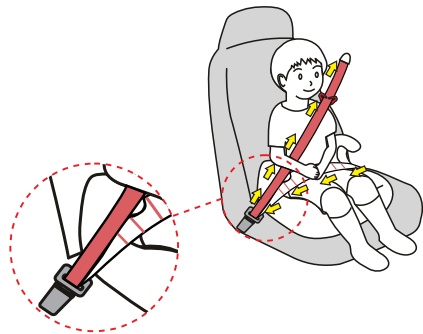

Buckle and belt guidance must be in the appropriate positions shown in the diagram, if in doubts, please contact the manufacturer.

For the safety of your child, before every journey in the car check that:

- The child safety seat is securely fastened;
- The lap belt section runs through the **belt guidance** on both sides of the seat cushion;
- The diagonal seatbelt section also runs through the **red crescent hook**;
- The diagonal seatbelt section runs diagonally backward;

**CAUTION!** If your child attempts to open the safety buttons, make sure you stop at the earliest opportunity. Check that the child safety seat is correctly attached and make sure that your child is properly secured. Teach your child about the dangers involved.

## 7. CARE AND MAINTENANCE

Periodically inspect your child seat for worn or damaged parts. If damaged parts are found, replace the child seat. Keep the child seat clean. Do not lubricate any parts of the child seat.

To prolong the life of your nursery product, keep it clean and do not leave it in direct sunlight for extended periods of time.

Removable fabric covers and trims may be cleaned using warm water with a household soap or a mild detergent. Allow it to dry fully, preferably away from direct sunlight.

### STORAGE

Store in a safe, dry place and away from heat and direct sunlight. Avoid placing heavy objects on top of the seat.

## 8. MAIN TECHNICAL PARAMETERS

Length: 410mm  
Width: 390mm  
Height: 210mm

