


Life is Precious. Be Safe.



Life is Precious.  
Be Safe.

## User Manual

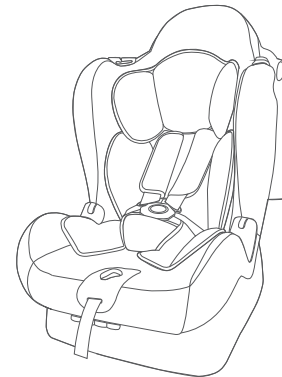

Koopers Distribution Sdn Bhd

☎ 03-78324338

🌐 [www.koopers.co](http://www.koopers.co)

📘 [www.facebook.com/koopersmalaysia](https://www.facebook.com/koopersmalaysia)

✉ [sales@koopers.co](mailto:sales@koopers.co)

📍 18-1, Jalan Bulan U5/BM, Section U5, Bandar Pinggiran Subang,  
40150 Shah Alam, Selangor  
Malaysia

**Lavolta**  
Group 0+, I, II (0-25kg)

## Thank you for trust to our products

For users:

Welcome to use **Koopers Lavolta** Children's safety seats. Please read user manual carefully before installing and using. This user manual is a great guide to help you use this product.

### WARNING

Don't put rearward facing children's safety car in the front row seat with the airbag.  
**IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S WEIGHT EXCEEDS 9kg.**

### WARNING

Only allow apply to the vehicle that is equipped with three-point safety belts and meet the requirement of ECE R16.

### WARNING

Don't use force-bearing points without marking.

### WARNING

1. This is a "Universal" child restraint. It is approved to Regulation No. 44/04 series of amendments, for general use in vehicles and it will fit most, but not all, car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.
3. This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.


## NOTICE

1. Safe driving is the best way to protect children, and children's safety seats can protect children effectively but cannot completely eradicate the harms of car accidents.
2. Please be sure to use the right Group of the children's seats with appropriate methods of application, which refer to the instructions manual of child restraint system. Otherwise, there is potential risk to cause child injuries.
3. Please make sure the children's safety seat is properly secured in the car before starting.
4. The child safety seat must not be positioned anywhere where it is in range of an airbag which is being deployed, otherwise, once accident happened, airbag can hurt your child.
5. Unauthorised technical modifications or seat coverings may reduce or entirely void the seat's protective properties.
6. This system only can apply to the vehicle that is equipped with three-point safety belts and pass requirements of ECE R16.
7. Please do not leave your child alone in the children's safety seat in the vehicle.
8. Forbid putting safety seat under direct sunshine to avoid skin burn under high temperature.
9. Once collision happens, please replace a new child safety seat if it has been damaged.
10. Forbid using safety seats that are not approved to ECE R44/04 or a comparable standard (see test label on belt with an "E" or "e" in a circle).
11. Forbid using safety seat without its cloth cover.
12. Forbid using materials that manufacturers not recommend.
13. Please do not let your children play with the safety seat in the vehicle to prevent risk of injury.
14. The steel components and plastic components of safety seat have to be fixed by referring to manual, which ensure safety seat not be stuck by car seats and car doors.
15. The more snugly the harness fits over your child's body, the safer your child will be. Meanwhile, the lap belts must not be twisted. It should restrict the position of pelvis.


## Table of Contents

Know your car seat.....	4-5
Selection Criteria for children's safety seats.....	6
Installation for Group 0+.....	7
Installation for Group I.....	8
Using Method for Group 0+/I.....	9-10
Removal of 5-point harness.....	11
Installation and Using Method for Group II.....	12
Removing the cover/Cleaning and maintain.....	13
Washing instructions.....	14

## Know your car seat

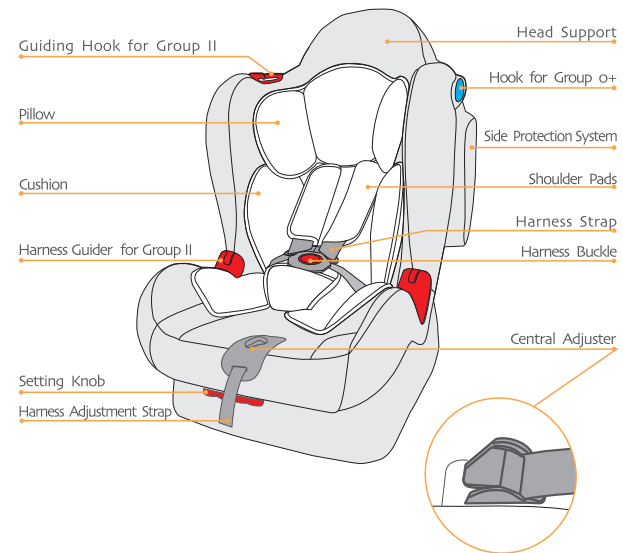

## Know your car seat

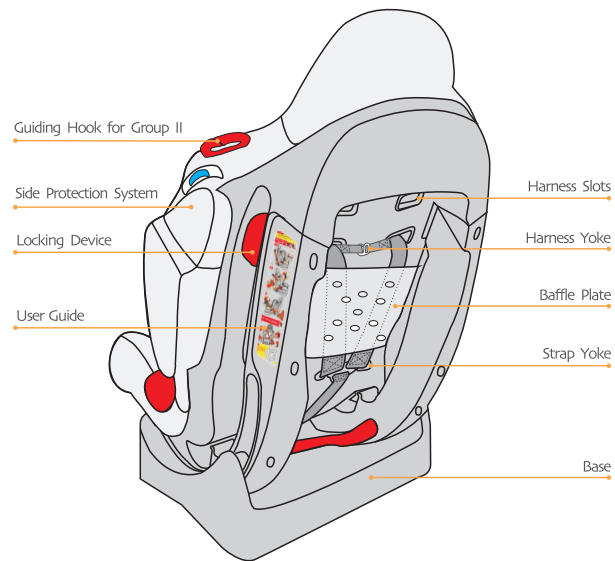

05


## Selection Criteria for children's safety seats

- This type children's safety seat is applied to Group 0+//I/II and the requirement for weight is from 0 to 25kg. It is suitable for around 0 to 6 year-old children. The vehicle should be equipped with three-point safety belts and meet the requirement of ECE R16.
- Different installation methods should be applied to children in different Group. Please check the below standards to match the right group installations.

Group	Body Weight	Age	Child Restraint System	Direction of Installation	Requirement for Vehicle
0+	0-13kg	0-15 months	5-point harness	Rearward Facing	Be equipped with 3-point safety belts and pass ECE R16
I	9-18kg	9 months-4 years old	5-point harness	Forward Facing	Be equipped with 3-point safety belts and pass ECE R16
II	15-25kg	4-6 years old	3-point car safety belt	Forward Facing	Be equipped with 3-point safety belts and pass ECE R16

❗1 Only can apply to Group 0+ after closing the airbag.

❗2 Only can apply to the vehicle that are equipped with 3-point safety belts.

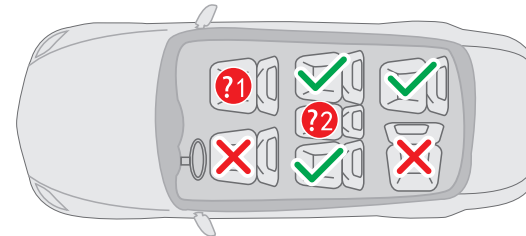


06


## Installation for Group 0+

### ATTENTION


- 1.The installation for Group 0+ is rearward facing and if your child's weight is below 9kg, you cannot make the forward facing installation.
- 2.For Group 0+, there is only one level and it is level 4 in blue.
- 3.A special cushion for Group 0+ should be place in the seat.

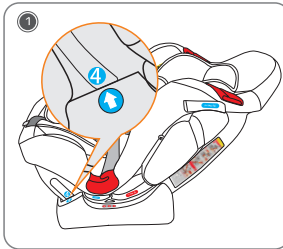

**Step 1:** Push the red knob and adjust the angle of seat to be the level 4. As shown in the picture, the blue arrow should point to 4.

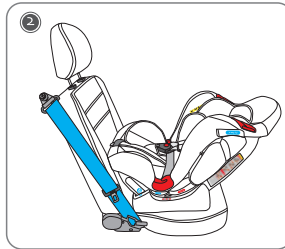

**Step 2:** Place the safety seat rearward in the car seat and make it cling to car seat back.

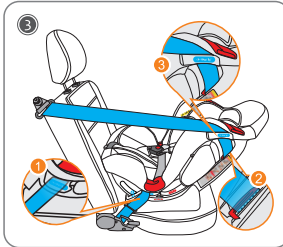


**Step 3:** As shown in the picture 3-1, the car safety belt passes through the hole of the safety seat according to the blue direction. As shown in the picture 4-1, put the car safety belt tongue into the car buckle. As shown in the picture 3-2, pull horizontal car belt tight and place oblique car belt into locking device, then pull belt tight again. As shown in the picture 3-3, next, put oblique car belt into hook for Group 0+ and pull belt tight again. Finally, shake the safety seat to ensure it is already fixed.

07

## Installation for Group I

### ATTENTION


- 1.The installation for Group I is forward facing and child's body weight have to be over 9kg and less than 18kg.
- 2.There are 3 adjustable levels in Red 1/2/3.
- 3.After adjusting the angle, the safety seat has to cling to car seat back and pull car safety belt tight.

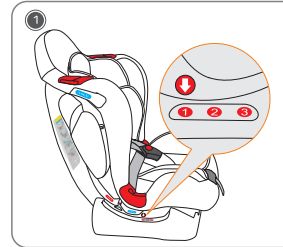

**Step 1:** Push the red knob to adjust the angle of seat to one of three levels before starting installation.




**Step 2:** Place the safety seat forward in the car seat and make it cling to car seat back.

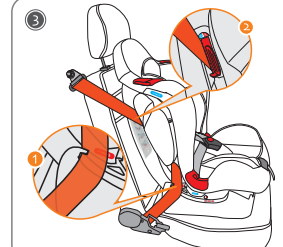


**Step 3:** As shown in the picture 3-1/4-1, the car safety belt passes through the hole of the safety seat according to the red direction. As shown in the picture 4-2, put the car safety belt tongue into the car buckle. As shown in the picture 3-2, pull horizontal car belt tight and place oblique car belt into locking device, then pull belt tight again, put remainder belt into seat belt retractor. Finally, shake the safety seat to ensure it is already fixed.

08


Using Method for Group 0+1

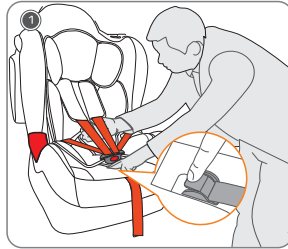


1. Press Central Adjuster and pull harness strap outward at the same time to make the strap loose.

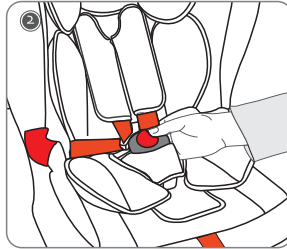


2. Press red button to open the harness buckle.

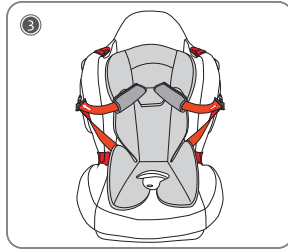

3. Pull out both of the shoulder belts to both sides of the child safety seat, or insert buckle tongues into fixed slots.

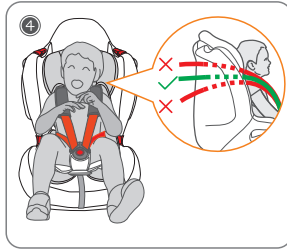


4. Place your child into seat and make sure the lap belt can restrict the position of pelvis. Please check the height of shoulder belts. It is better to make shoulder belts be a little bit higher than child's shoulders.

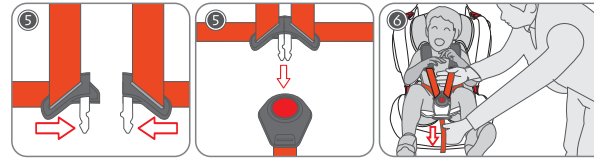


5. Harness Buckle: put the two latches together and engage them before putting them into the harness buckle, you can hear a "click" noise. The buckle latches will be released if you press the red button.


6. Adjust the straps by pull harness adjustment strap outward and make sure that the tightness is comfortable for your child.

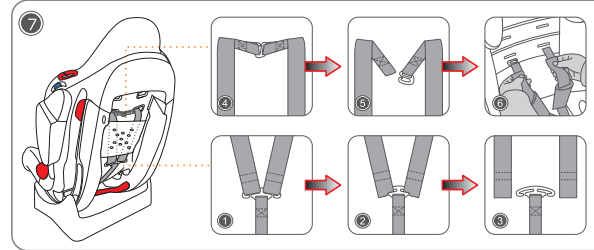

7. The shoulder belt height adjuster: before adjustment, remove baffle plate first. According to different heights of children, 4 levels of shoulder belt heights can be adjusted. Firstly, as shown in picture 1/2/3, separate the shoulder safety belt with strap yoke, and then according to 4/5, separate the shoulder belt with harness yoke and correspond to the appropriate harness slots to insert both of shoulder safety belts (see picture 6). Finally, connect both of the safety belts as shown in figures (3/2/1&5/4).

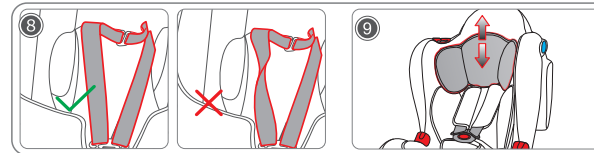


8. Caution: Do not twist the belts.

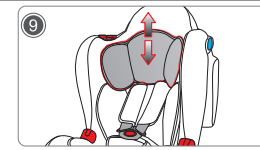


9. Adjusting the height of pillow to fit children's head.

## Removal of 5-point harness

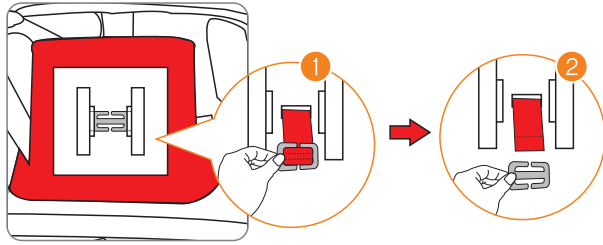

Step 1: Adjusting the angle of safety seat to level 4, press central adjuster and maximum loose the shoulder belts. Then, remove the bracket in the bottom of safety seat and separate it with safety belt.

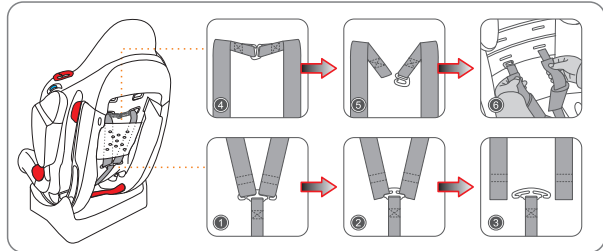


Step 2: Firstly, before adjustment, remove baffle plate. As shown in picture 1/2/3, separate the shoulder safety belt with strap yoke, and then according to 4/5, separate the shoulder belt with harness yoke and pull harness strap out; then, pull the strap with buckle out of the seat as well (see picture 6). Next, pull harness adjustment strap tight and hide strap under cloth cover. Finally, you can storage harness strap.

## Installation and Using Method for Group II

### ATTENTION

1. Only one adjustable level for Group II is Red Level 1.
2. Before Installation for Group II, remove 5-point harness and cushion.
3. Pull car safety belt tight and make sure car belt tongue insert car buckle correctly.

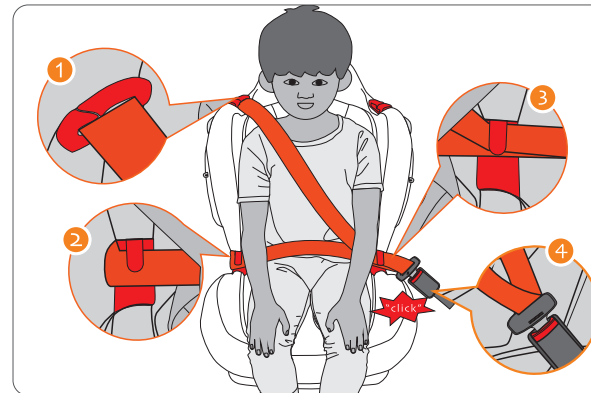

- Place your child into seat and make oblique car belt pass through red guiding hook for Group II (see picture 1).


- Then, make horizontal car belt pass through red harness guider for Group II (see picture 2 & 3).

- Next, car belt tongue insert car buckle correctly and you can hear click noise (see picture 4).

- Finally, make sure the lap belt can restrict the position of pelvis.

## Removing the cover

Separate the shoulder safety belt with strap yoke, and then separate the shoulder belt with harness yoke. Open harness buckle and take off cloth cover from safety seat.

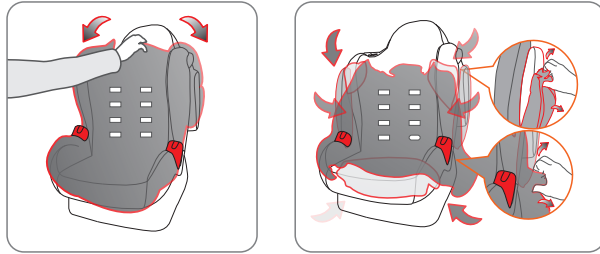

### CAUTION!

When you want to refit the cover, just take steps in the opposite order.

## Cleaning and maintenance

1. Check all components of safety seat regularly and if the accident happens, you have to replace a new safety seat.
2. Storage safety seat in a dry, ventilative and cool place when it is not used for an extended period of time.
3. If food or beverage makes the safety belt dirty, remove the belt and rinse using warm water and make it dry by airing.
4. If wash the whole cloth cover, please refer to the washing instructions.
5. If wash the cover in the first time, the cover might fade a little bit. It is a normal phenomenon.

## Washing instructions

### CAUTION!

Do not use solvents, chemical cleaners and lubricants.



HAND WASH  
using the water  
temperature under 30



Do Not Bleach



Dry clean, use the  
detergents excluded  
trichloroethylene.



Do Not Machine Dry



Do not Iron