



Life is Precious.
Be Safe.

Koopers Distribution Sdn Bhd

☎ 03-78324338

🌐 www.koopers.co

📘 www.facebook.com/koopersmalaysia

✉ sales@koopers.co

📍 8, Jalan Zuhai U5/178, Seksyen U5, Bandar Pinggiran Subang
40150 Shah Alam, Selangor, Malaysia



Life is Precious.
Be Safe.

R129 SAFE COLLECTION

Ergo Lite





40-87cm
Birth to 15 months

Infant Carrier




INSTRUCTION MANUAL

STRUCTURE NAME

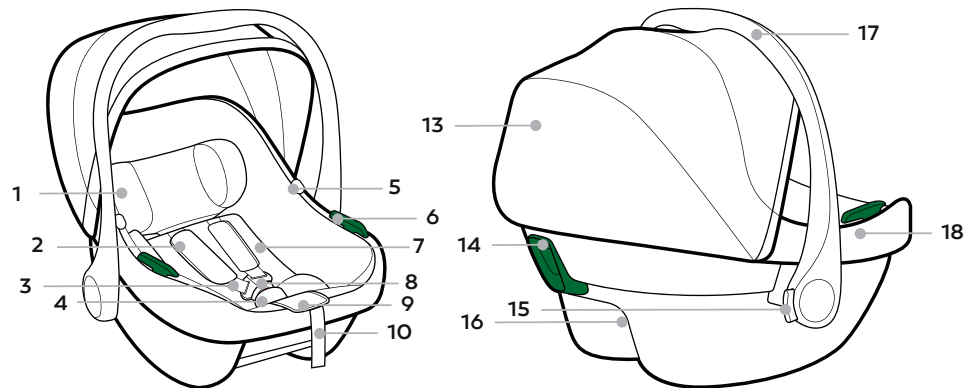

- 1 Headrest
- 2 Shoulder Pads
- 3 Shoulder Straps
- 4 Crotch Pad
- 5 Separate Adapter Buttons
(optional for stroller)
- 6 Lap Belt Guidance
- 7 Seat "Cradleyou" Reducer
- 8 Y-shaped Belt
- 9 Adjustment Button
- 10 Crotch Strap
- 11 Buckle Tongues
- 12 Red Release Button
- 13 Sunshade
- 14 Shoulder Belt Guidance
- 15 Swivel Buttons
- 16 Headrest Height Adjuster
- 17 Handle
- 18 Seat Cover




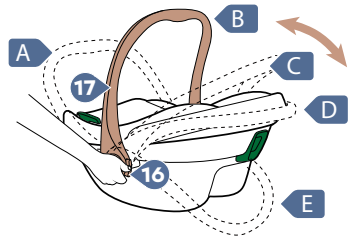


Handle 1

2 Sunshade

Using 3

3

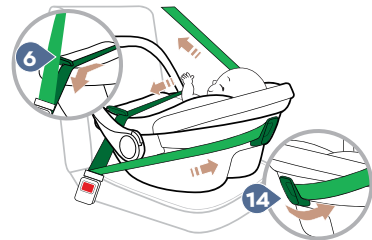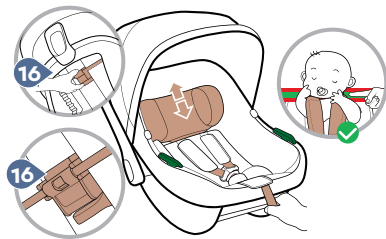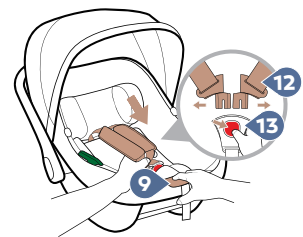
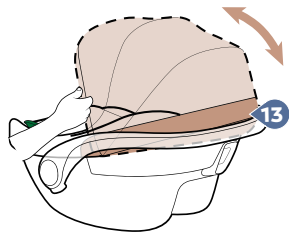


3

4 Clean

4

4

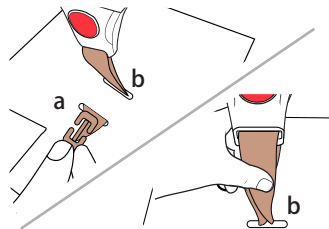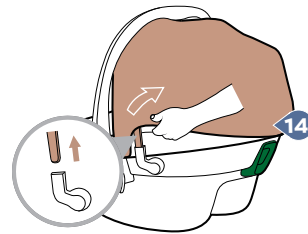

APPROVAL


These instructions use the following symbols:

Symbol	Keyword	Explanation
	DANGER!	RISK of severe personal injury
	WARNING!	RISK of minor personal injury
	CAUTION!	RISK of material damage
	TIP!	Useful notes

The B003 is exclusively intended to secure your child in your vehicle.

Rearward facing		Never use the infant carrier facing forwards.
Body Size	Installation method	
40-87CM ; ≤13kg	Belt + Y-shaped Belt	

This infant carrier has been designed, tested and approved according to the requirements of the European Standard for Child Safety Equipment R129/03. This infant carrier may only be used to secure a child in the vehicle.

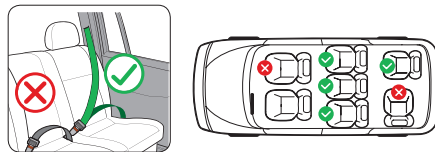

The B003 ECRS can be installed on ISOFIX base. Please make sure you read the user manual of this base carefully. This B003 ECRS is suitable for seat belt models equipped with the 3-point seat belts that has passed the ECE R16 requirement and is not suitable for models only equipped with 2-point seat belts.

1. Handle

1. Hold down both **Swivel Buttons** (15). Move **Handle** (17) to desired position, then release **Swivel buttons** (15). Ensure that the **Handle** (17) is locked with a clicking sound.

2. You can adjust the **Handle** (17) in five positions: A, B, C, D and E as shown:

A - For the car is moving.

B - For placing infant carrier inside/outside.

C - For your usage requirement.

D - For placing your child inside/outside.

E - For setting the infant carrier down safely outside the car.

2. Sunshade

The **Sunshade** (13) protects your child's head from sunlight.

It is foldable to open and close.

3. Using

Facing backwards (40-87cm) Installation

Install the infant carrier with Adult safety belt

Put the child in

1. Loosen the **Shoulder Straps** (3) by pressing the **Adjustment Button** (9) and pull both shoulder straps forwards.

2. Press **Red Release Button** (12) to open the **Y-shaped Belt** (8). Move the Y-shaped Belt straps to the side to place the child in the seat.

3. Bring both **Buckle Tongues** (11) together. Lock **Buckle Tongues** (11) in **Y-shaped Belt** (8) with a clicking sound.

4. Pull **Headrest Height Adjuster** (16) from back with your finger press the top of the adjuster. Move the **Headrest** (1) freely up and down to find a suitable position and then release the **Headrest Height Adjuster** (16). Now the headrest is fixed in the position you want.

5. Adjust the **Headrest** (1) to proper position. Make sure the distance between child's shoulder and the bottom of the headrest is lower than one finger.

6. Pull the **Crotch Strap** (10) until the strap lies flat and snug on your child's body. Make sure **Shoulder Straps** (3) slightly higher or equal to child's shoulders.

WARNING! Place shoulder straps tight to the child's body.

Installation of the infant carrier

Secure infant carrier with Adult safety belt.

⚠ WARNING! Note and follow the vehicle handbook during use, be sure to observe any restrictions relating to airbags.

⚠ WARNING! Never secure the infant carrier with a 2-point seat belt.

1. Pass the seat belt over the infant carrier. Let the lap belt go through the **Lap Belt Guidance (6)** on both sides of the infant carrier edge.

2. Lock the tip of the buckle into the vehicle seat buckle with a clicking sound.

3. Pull the shoulder belt to the back of the infant carrier. Let the shoulder belt go through the **Shoulder Belt Guidance (14)**.

4. Follow the direction of arrow to tighten shoulder belt and lap belt.

5. When the car is driving, the handle should be in the A position.

WARNING! Before each car journey, in order to ensure your child's safety, make sure that...

The infant carrier is securely fastened;

The Y-shaped Belt of the infant carrier is fitted snugly to the child's body without being constricting and should not be twisted;

The **Shoulder Straps (3)** are correctly adjusted and the straps are not twisted;

The **Shoulder Pads (2)** are in the correct position on your child's body;

The **Buckle Tongues (11)** are inserted into the **Y-shaped Belt (8)**.

4. Clean

Fabric cover

Only use authentic seat covers. The **Seat Cover (18)** is an integral part of the child safety seat and is key to ensure the trouble-free functionality of the system. Seat covers replacement are available from your dealer.

1. Open the **Y-shaped Belt (8)**.

2. Remove **Shoulder Pads (2)** and **Crotch Pad (4)**.

3. Lift a corner of the **Sunshade (13)** and remove the connect link then you can remove the **Seat Cover (18)**.

The baby **Seat "Cradleyou" Reducer (7)** can be washed in the same way as the cover. Remove all foam parts from the top and bottom sections before

ⓘ TIP! When you use infant carrier, make sure seat "cradleyou" reducer underneath the shoulder straps. Make sure that the seat "cradleyou" reducer is in contact with the backrest of the infant carrier.

⚠ WARNING! Use the seat "cradleyou" reducer when your baby is 40-75cm. Remove the seat "cradleyou" reducer when your baby is >75cm.

Y-shaped Belt

1. Rotate the metal plate on crotch strap by 90° vertically. Slide the metal plate downward through the Y-shaped Belt slot (a) as shown.

2. Pull **Crotch Strap (10)** and slide the metal plate by 90° vertically upward through the Y-shaped Belt slot (b) as shown. Remove **Y-shaped Belt (8)** from base.

⚠ CAUTION! Make sure the metal plate is above slot (a), crotch strap goes through slot (b).

To ensure the safety of your child, it is absolutely essential that the Y-shaped Belt continues to function correctly. Y-shaped Belt malfunctions are usually caused by a build-up of soiling or by external objects:

When you press the **Red Release Button (12)**, it takes a long time for the **Buckle Tongues (11)** to be ejected.

The **Buckle Tongues (11)** no longer engage (i.e. when you try to push them in, they pop out again).

The **Buckle Tongues (11)** engage without a clicking sound.

The **Buckle Tongues (11)** are difficult to push in (If you feel a certain amount of resistance).

The **Y-shaped Belt (8)** only opens if extreme force is applied.

Remedy: Soak the Y-shaped Belt in warm water containing washing-up liquid for at least an hour. Rinse the buckle thoroughly and dry it.

The plastic parts and the Y-shaped Beltes can be cleaned with soapy water. Do not use any caustic cleaning agents (such as solvents).

DISPOSAL

Please observe the waste disposal regulations in your country.

Disposal of packaging	Container for cardboard boxes
Seat cover	Residual waste, waste incineration
Plastic parts	To be placed in the corresponding container according to labelling
Metal parts	Container for metals
Belt straps	Container for polyester
Buckle and tongue	Residual waste

SAFETY NOTES

NOTICE

Notice regarding Universal Belted category Enhanced Child Restraint Systems(40-87cm)

This is a Universal Belted Enhanced Child Restraint System. It is approved according to UN Regulation No. 129, for use primarily in "Universal seating positions" as indicated by vehicle manufacturers in the vehicle user's manual.

If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

DANGER!

Please carefully read and make sure you understand all instructions in this manual and in the vehicle handbook relate to child safety seats. Install and use the child safety seat as described in the instruction manual. Failure to do this could result in serious injury even death of your child. Keep the instructions together with the ECRS for future reference.

DANGER!

Because of potential medical issues inherent to low birth weight and premature infants, always have a trained professional doctor or hospital staff assess the suitability of the ECRS prior to leaving the hospital or using the ECRS.

MAKE SURE any straps holding the ECRS to the vehicle should be tight. Any straps restraining the child should be adjusted to the child's body. Make sure straps should not be twisted.

HOT! The child seat should be kept away from sunlight if the seat is not provided with a textile cover, otherwise it may be too hot for the child's skin.

MAKE SURE The child seat should be kept away from sunlight if the seat is not provided with a textile cover, otherwise it may be too hot for the child's skin.

DO NOT leave your child unattended in this restraint even for a short time.

DO NOT leave your child unsupervised in the vehicle, for the temperature in a vehicle can rise dangerously quickly. Take breaks and take the

child out of the infant carrier as often as possible, if you are on long journeys. It will be good for your child's spine.

MAKE SURE any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

A) DO NOT use the ECRS without the cover.

B) DO NOT replace seat cover with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.

ONLY use rearward facing installation. (refer to instruction)

MAKE SURE the rigid items and plastic parts of a ECRS shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

MAKE SURE the ECRS is changed when it has been subject to violent stresses in an accident.

DO NOT make any alteration or additions to the

ECRS without the approval of the Type Approval Authority, or a danger occurs if not following closely the installation instructions provided by the ECRS manufacturer.

⚠ WARNING!

The safest place for your baby is the rear of your car. Airbags are designed to protect adults. The use of a front airbag with an infant carrier can lead to fatal injuries.